



| PROPERTY | TEST PROCEDURE | VALUE |
|------------------------------|------------------|------------------------|
| Grab Tensile Strength | ASTM D4632 | 802.6 lbs. |
| Apparent Breaking Elongation | ASTM D4632 | 25% / 18% |
| Trapezoid Tearing Strength | ASTM D4533 | 607 lbs. |
| Puncture Resistance | ASTM D4833 | 374.3 lbs. |
| Mullen Burst | ASTM D3786 | 456.88 psi |
| Apparent Opening Size | ASTM D4751 | 70 US Sieve / 0.212mm |
| Constant Head Permittivity | ASTM D4491 | 20.16 g/m ² |
| Wide Width Tensile | ASTM D4595 | 685.7 lbs./in. |
| Material | Woven Geotextile | 100% Polypropylene |

Note: Mats ship in 1.5' or 450mm diameter rolls with an approximate weight of 90 lbs or 40 kg per mat.


PLAN VIEW OF TYPICAL MAT

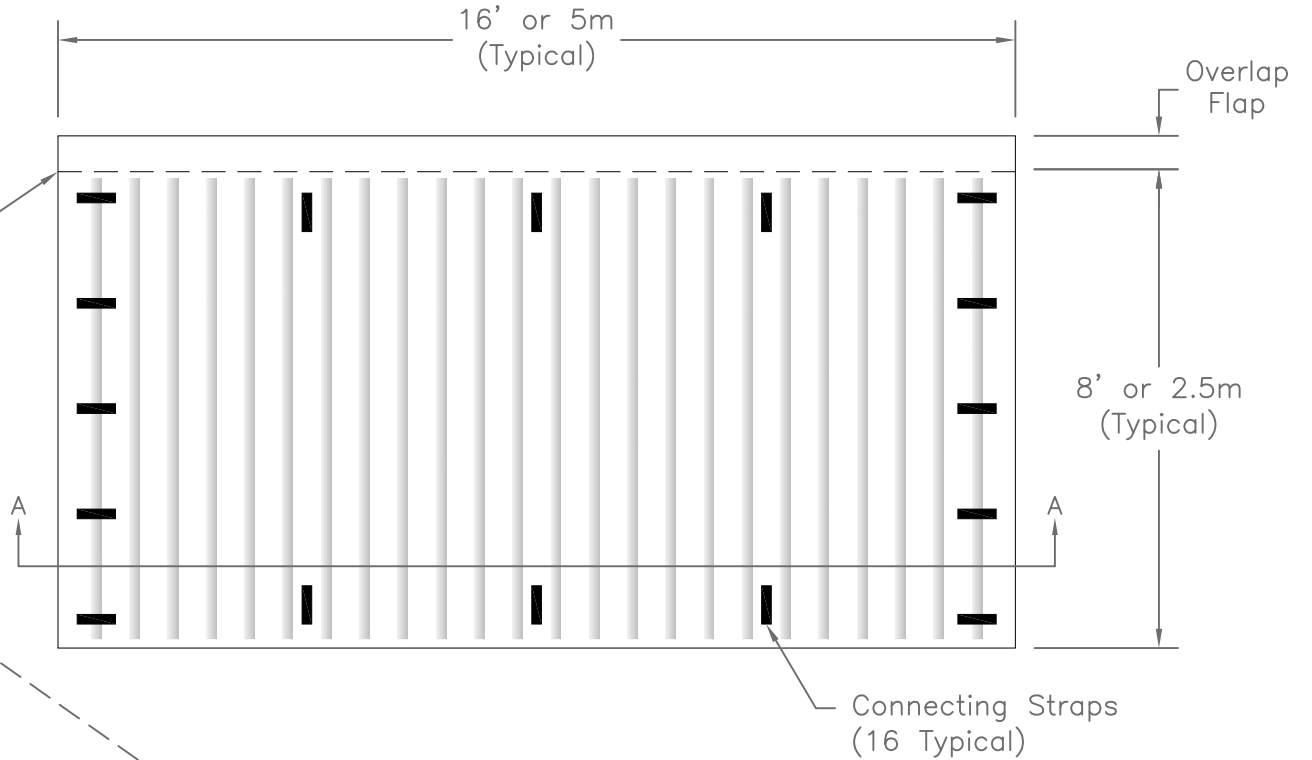

Ends are Sewn or Clipped Shut to Confine Reinforcing Members

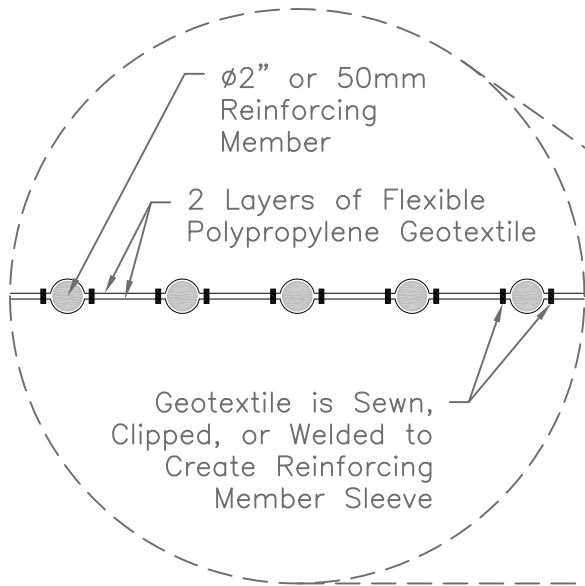

CROSS SECTION AA

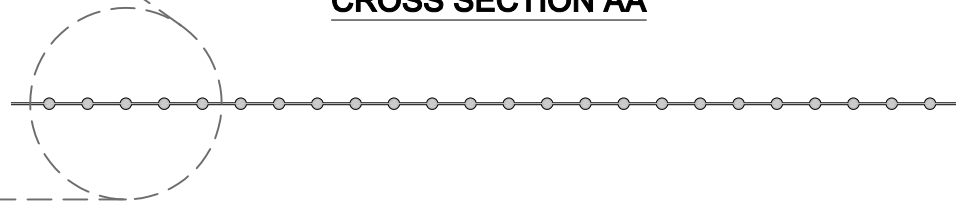

Interface H2O, LLC 10694 Chicago Dr.
Zeeland, MI 49464

PLAN VIEW AND CROSS SECTION

AGES MUD MAT - STANDARD DETAILS

REVISED:
12-17-14 LRH